

VersaTREAD

Sustainable and Durable Finished Rubber Flooring



ENGINEERED FOR PERFORMANCE

Get the perfect combination of durability and comfort with Pliteq's high-performance rubber flooring. Easy to install, VersaTREAD is engineered for long lasting performance. Superior density and tensile strength , with minimal mainenance needed. The textured surface enhances slip resistance, making it ideal for high-traffic commercial and fitness environments. Available in multiple formats, including rolls, tiles, and sheets. VersaTREAD offers design flexibility with a range of standard and premium color blends to complement any space. Built to withstand heavy wear while maintaining its performance.

KEY FEATURES

Durable

Made from high-performance rubber for long-lasting wear resistance in high-traffic areas.

Sustainable

Non-vulcanized recycled rubber with the least porous design on the market to ensure no odor and superior air quality.

Non-porous

Ensures dirt, debris, water, and bacteria do not get into the surface, allowing for ease of maintenance and limiting need for replacement.



Thickness	Tile 2' x 2' or 3.5' x 3.5'	SHEET 4' x 6'	Roll 4' x 25'
3mm			
6mm			
8mm			
9mm			
10mm			
12mm			

*Additional formats/ custom lengths available upon request

BENEFITS

Sustainable & LEED-Compliant

Manufactured using high-density recycled rubber, VersaTREAD contributes to sustainable building initiatives and can qualify for LEED credits. The material composition meets stringent environmental standards for low VOC emissions.

Impact & Vibration Damping

VersaTREAD's elastomeric composition provides high shock absorption, reducing impact noise and vibration transmission. Engineered to mitigate structure-borne and airborne sound energy, enhancing acoustic performance in multi-level buildings.

Surface Compatibility


Designed for direct application over concrete, wood, metal, and other subfloors. Compatible with adhesive or loose-lay installations based on project requirements. Precision-cut edge profiles ensure seamless integration with adjacent flooring materials.

Chemical & Moisture Resistance

Non-porous and resistant to common chemicals, oils, and moisture penetration. The hydrophobic properties prevent microbial growth, meeting hygiene requirements for healthcare, fitness, and commercial applications.

Low-Maintenance

Engineered for high-traffic areas, VersaTREAD flooring resists sustained wear and tear and will not harden or become brittle with age.

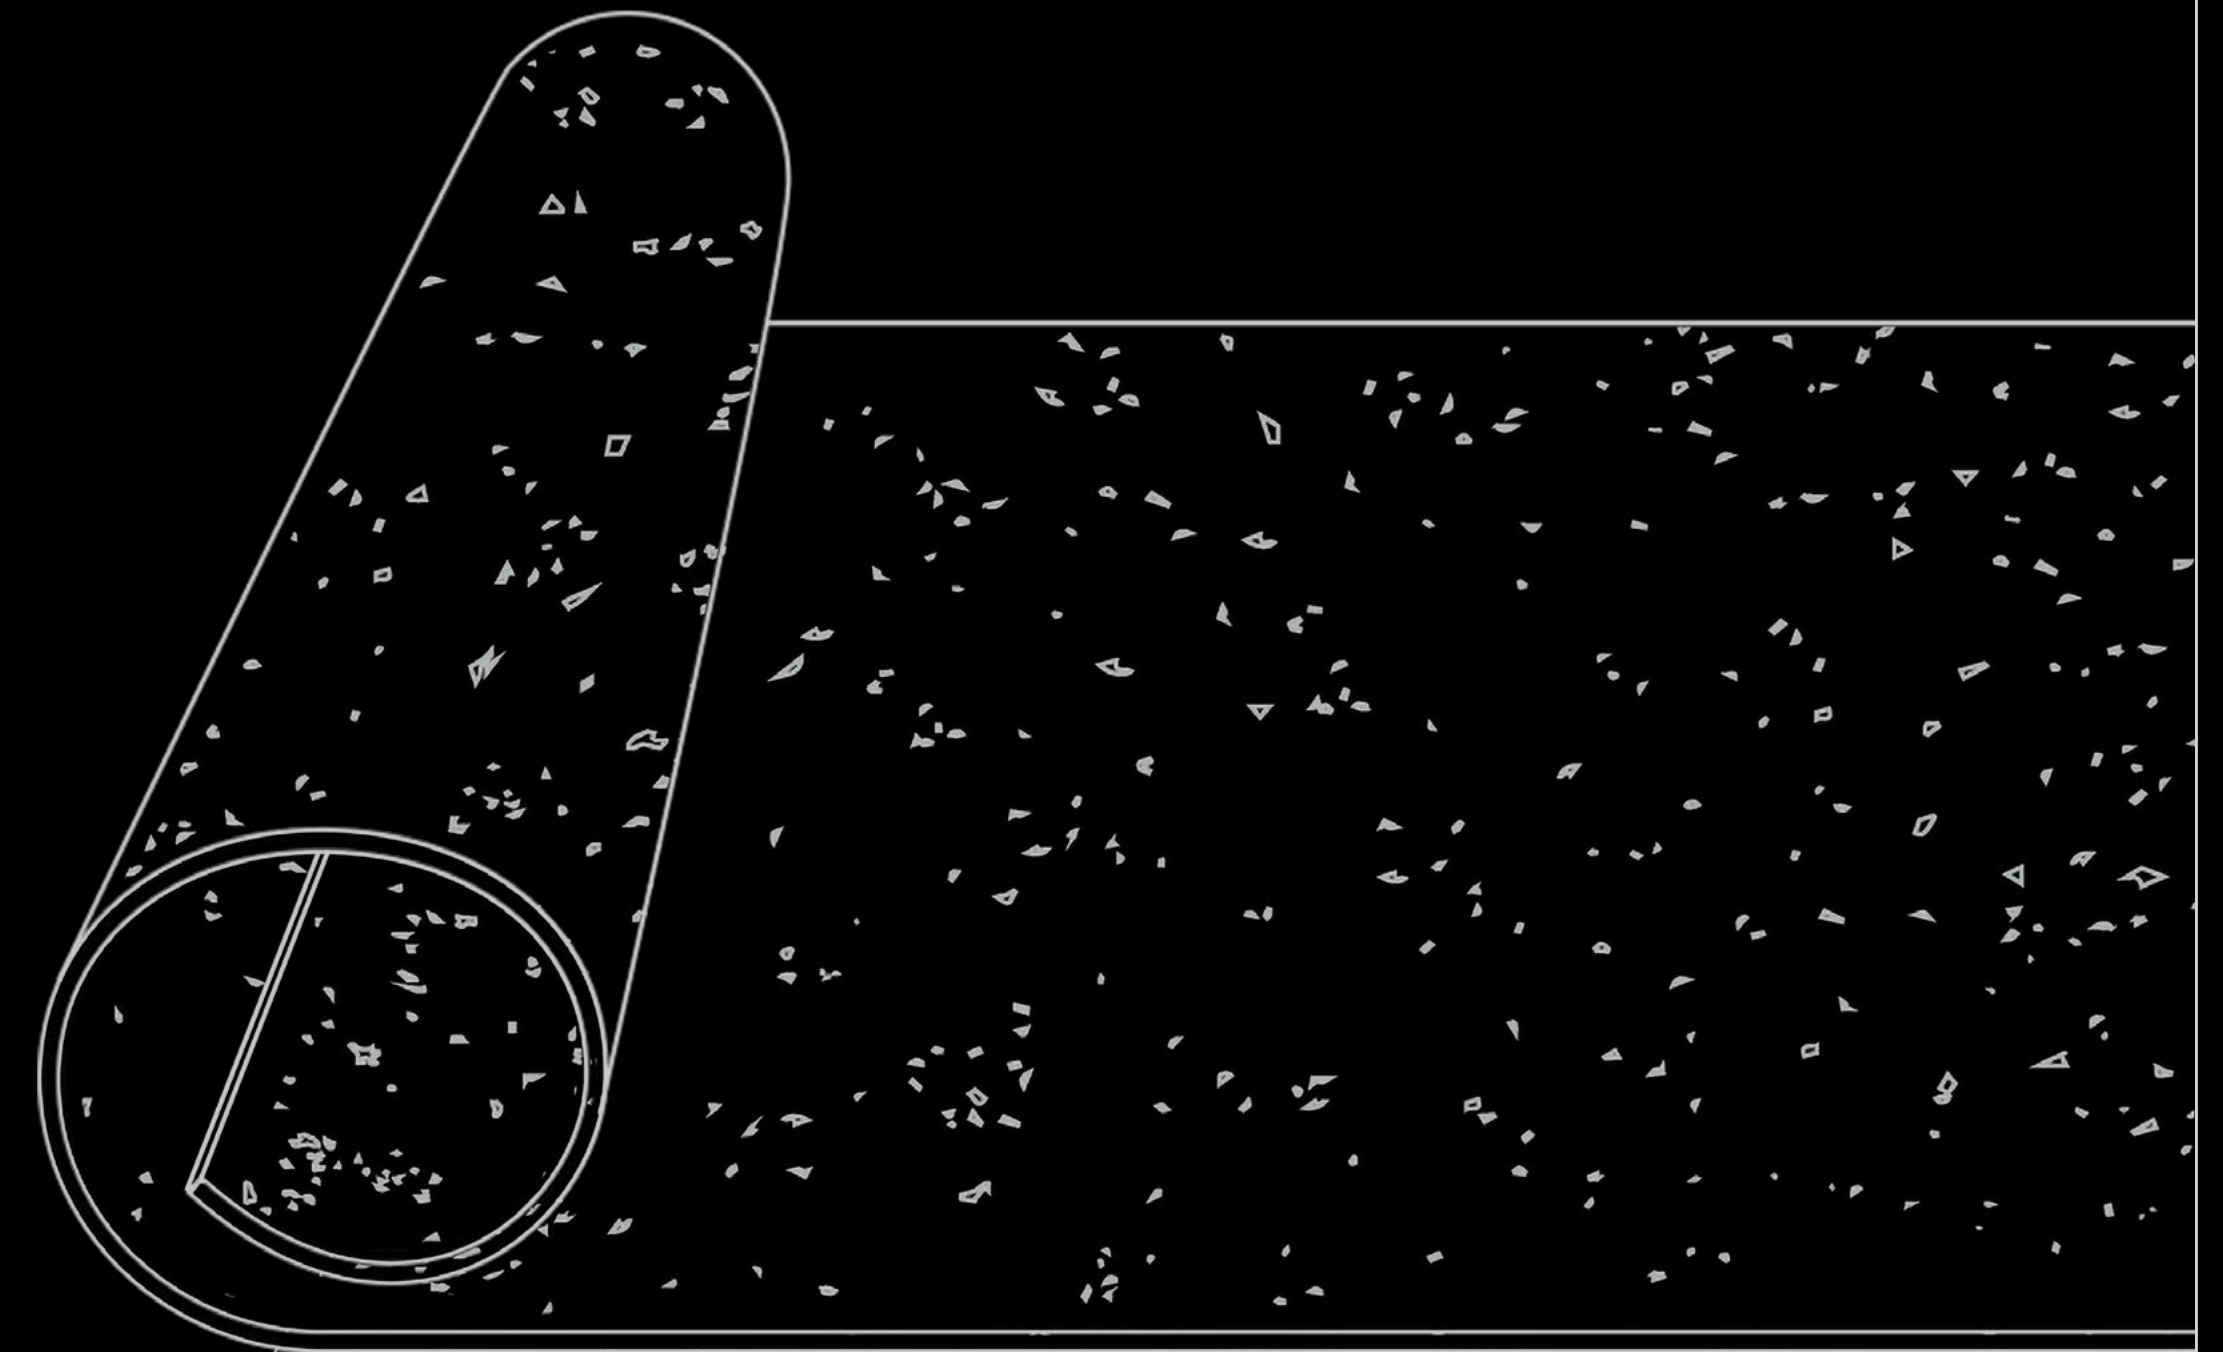





COLOR OPTIONS

Choose from our broad selection of color options, with 14 standard and premium colors available to ship per standard lead times based on project size. Reach out to your Pliteq sales rep for more details.

Standard

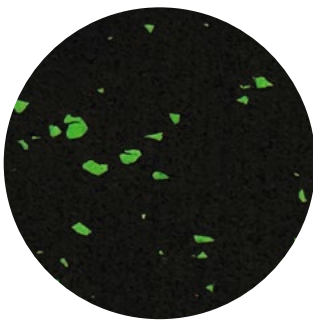


1710
Gametime
Green

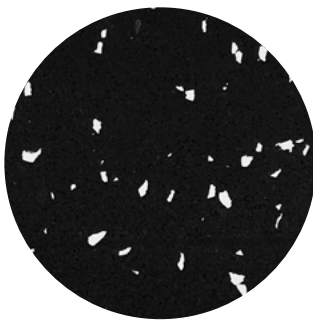


1711
Wildcard
White




1712
Sterling
Silver



1713
Breakaway
Blue




1714
Rebound
Red



1715
Overtime
Orange



1716
Coach
Cork




1717
Bold
Black

Premium



1701
Mulch



1702
Sandstone



1703
Obsidian



1704
Granite



1705
Concrete



1706
Marble



CUSTOM COLOR OPTIONS

Create a unique flooring pattern for your project with a custom mix of 24 EPDM colors that you can blend together for a variety of aesthetic designs.



01
Steel



02
Coal



03
Walnut



04
White



05
Cotton



06
Khaki



07
Blonde



08
Cork



09
Pink



10
Red



11
Brick



12
Orange



13
Marigold



14
Sky Blue



15
Blue



16
Deep Sea



17
Cobalt



18
Lilac



19
Green



20
Moss



21
Emerald



22
Fern



23
Shamrock



24
Clay

FORMATS

VersaTREAD
Rolls

Roll size: 4' x 25' (1.2m x 7.6m)

VersaTREAD 03


VersaTREAD 06

VersaTREAD 08

VersaTREAD 09

VersaTREAD 10

VersaTREAD 12

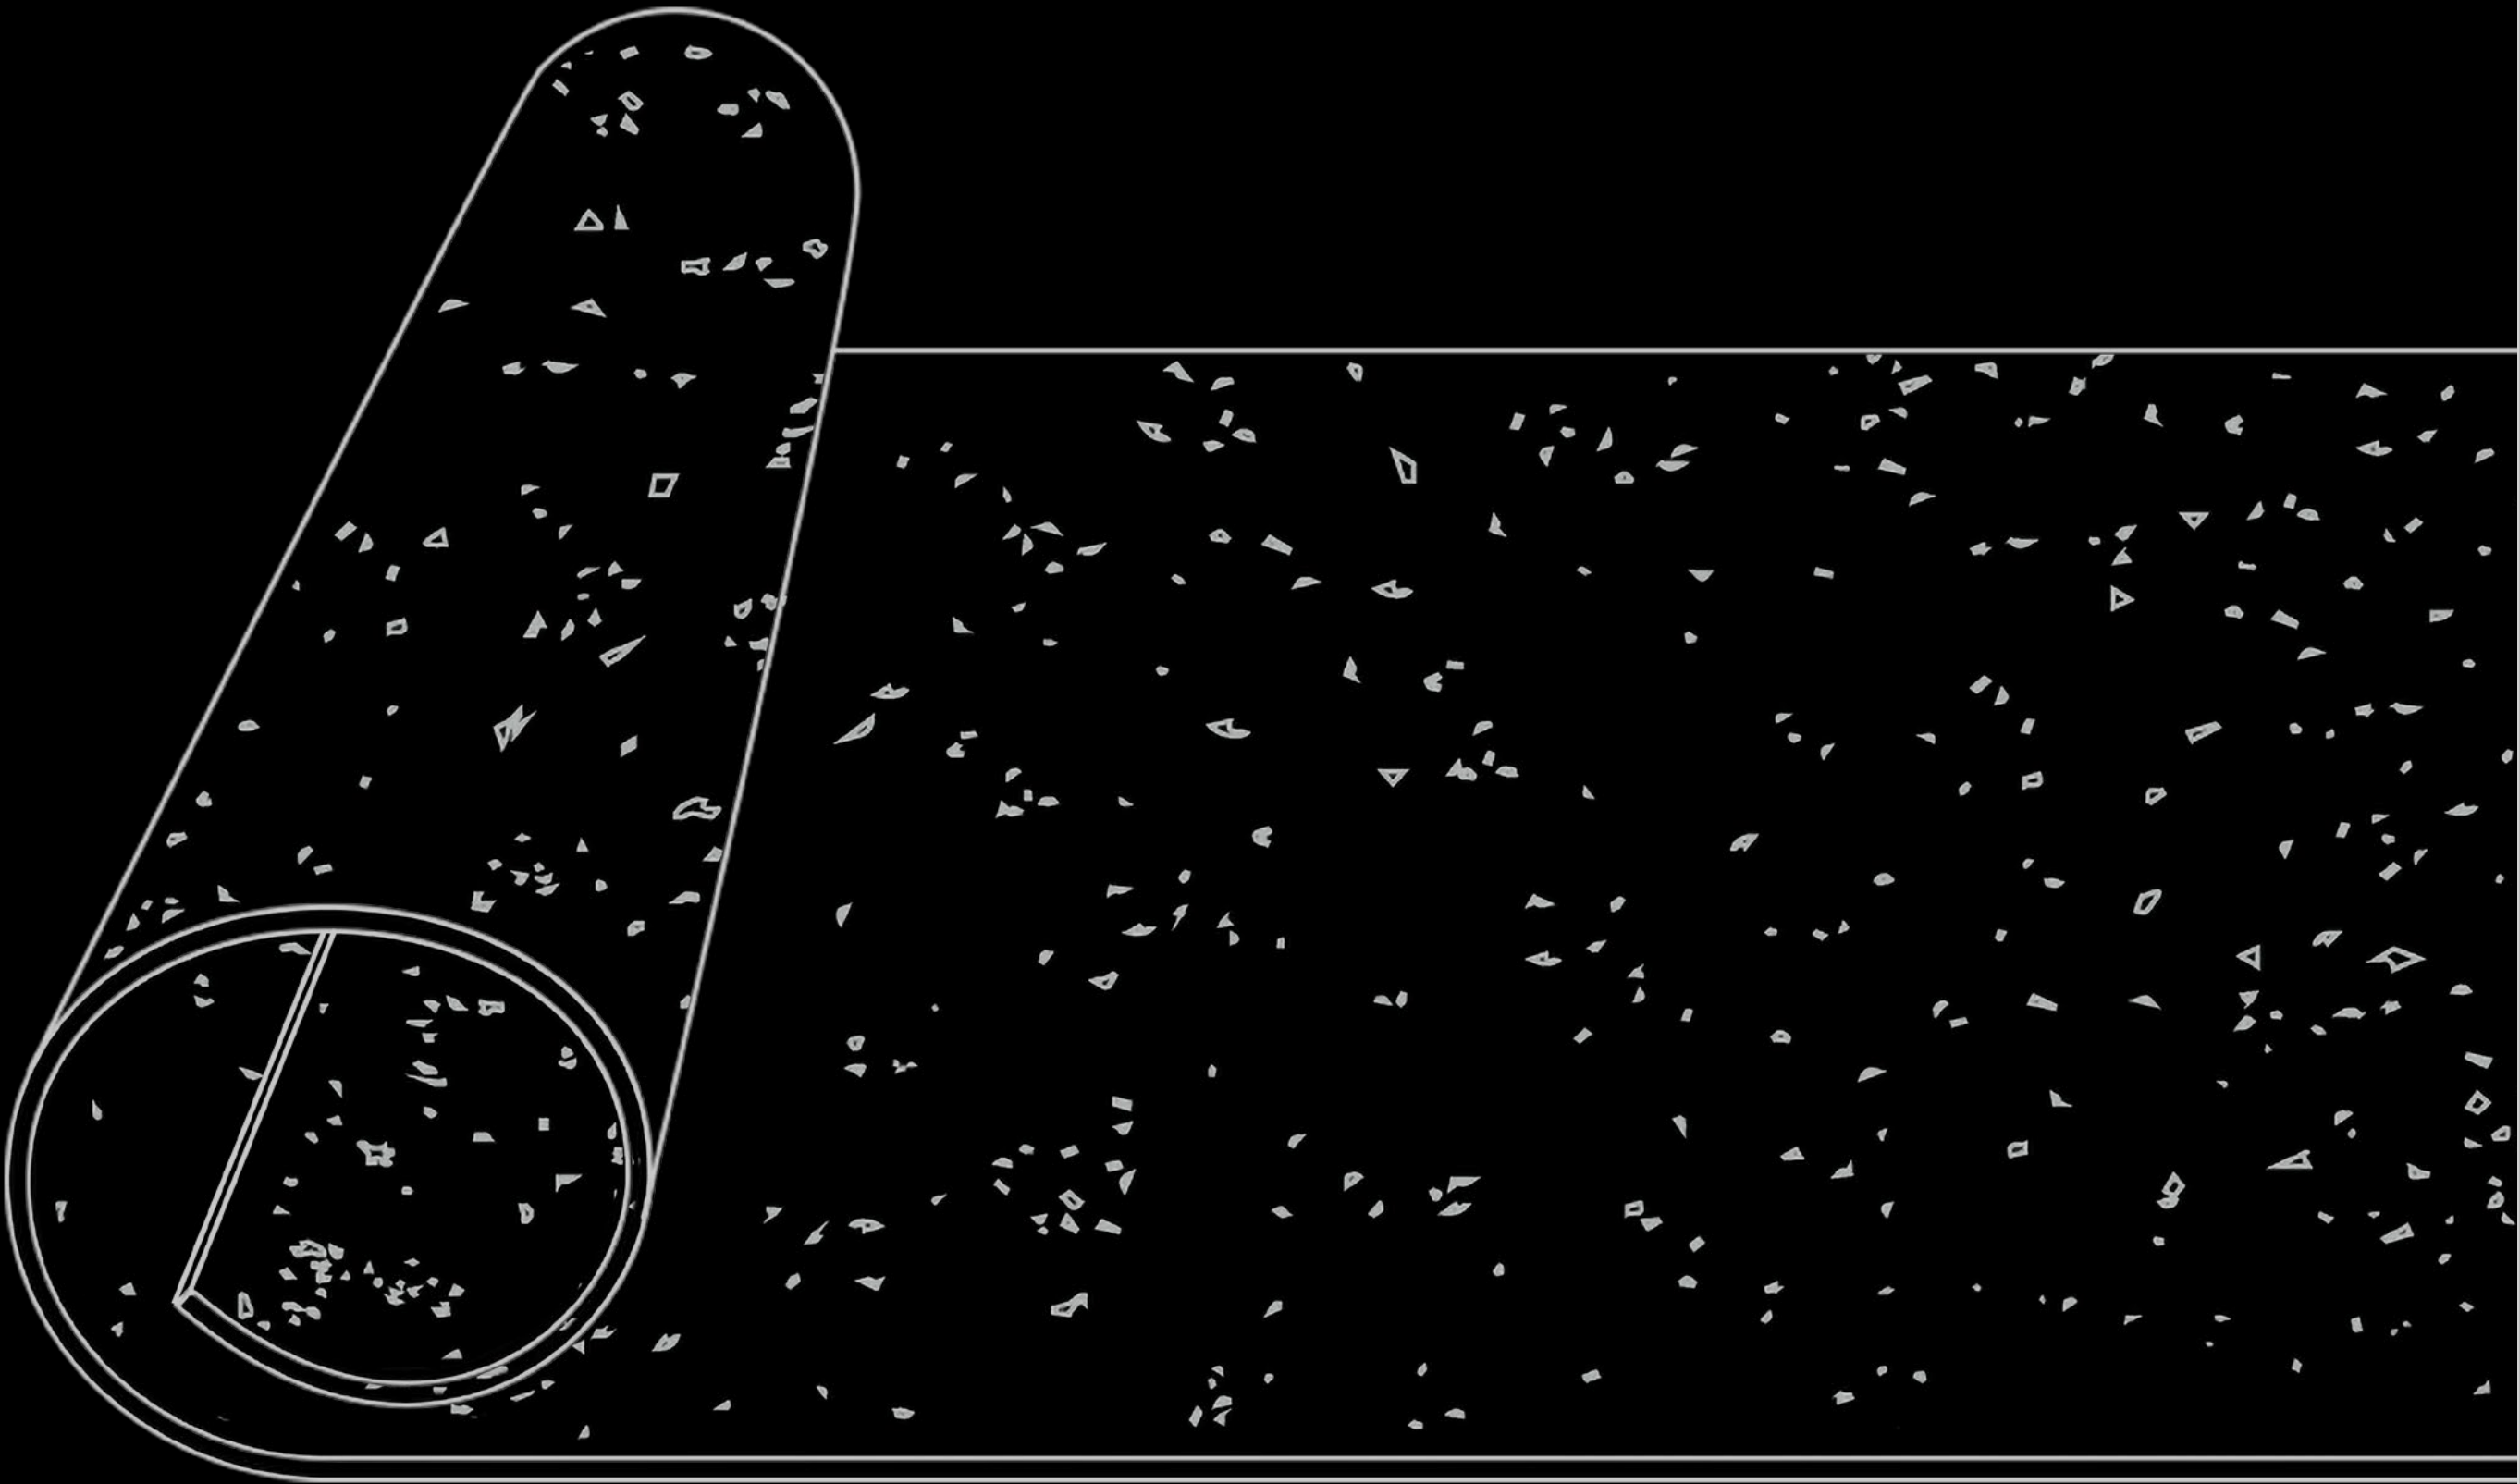

Custom roll lengths available upon request.

FORMATS

VersaTREAD
Puzzle Tile

Tile size: 2' x 2' or 3.5' x 3.5' (0.6m x 0.6m or 1m x 1m)


VersaTREAD 06

VersaTREAD 08

VersaTREAD 09

VersaTREAD 10

3.5' x 3.5' available upon request.

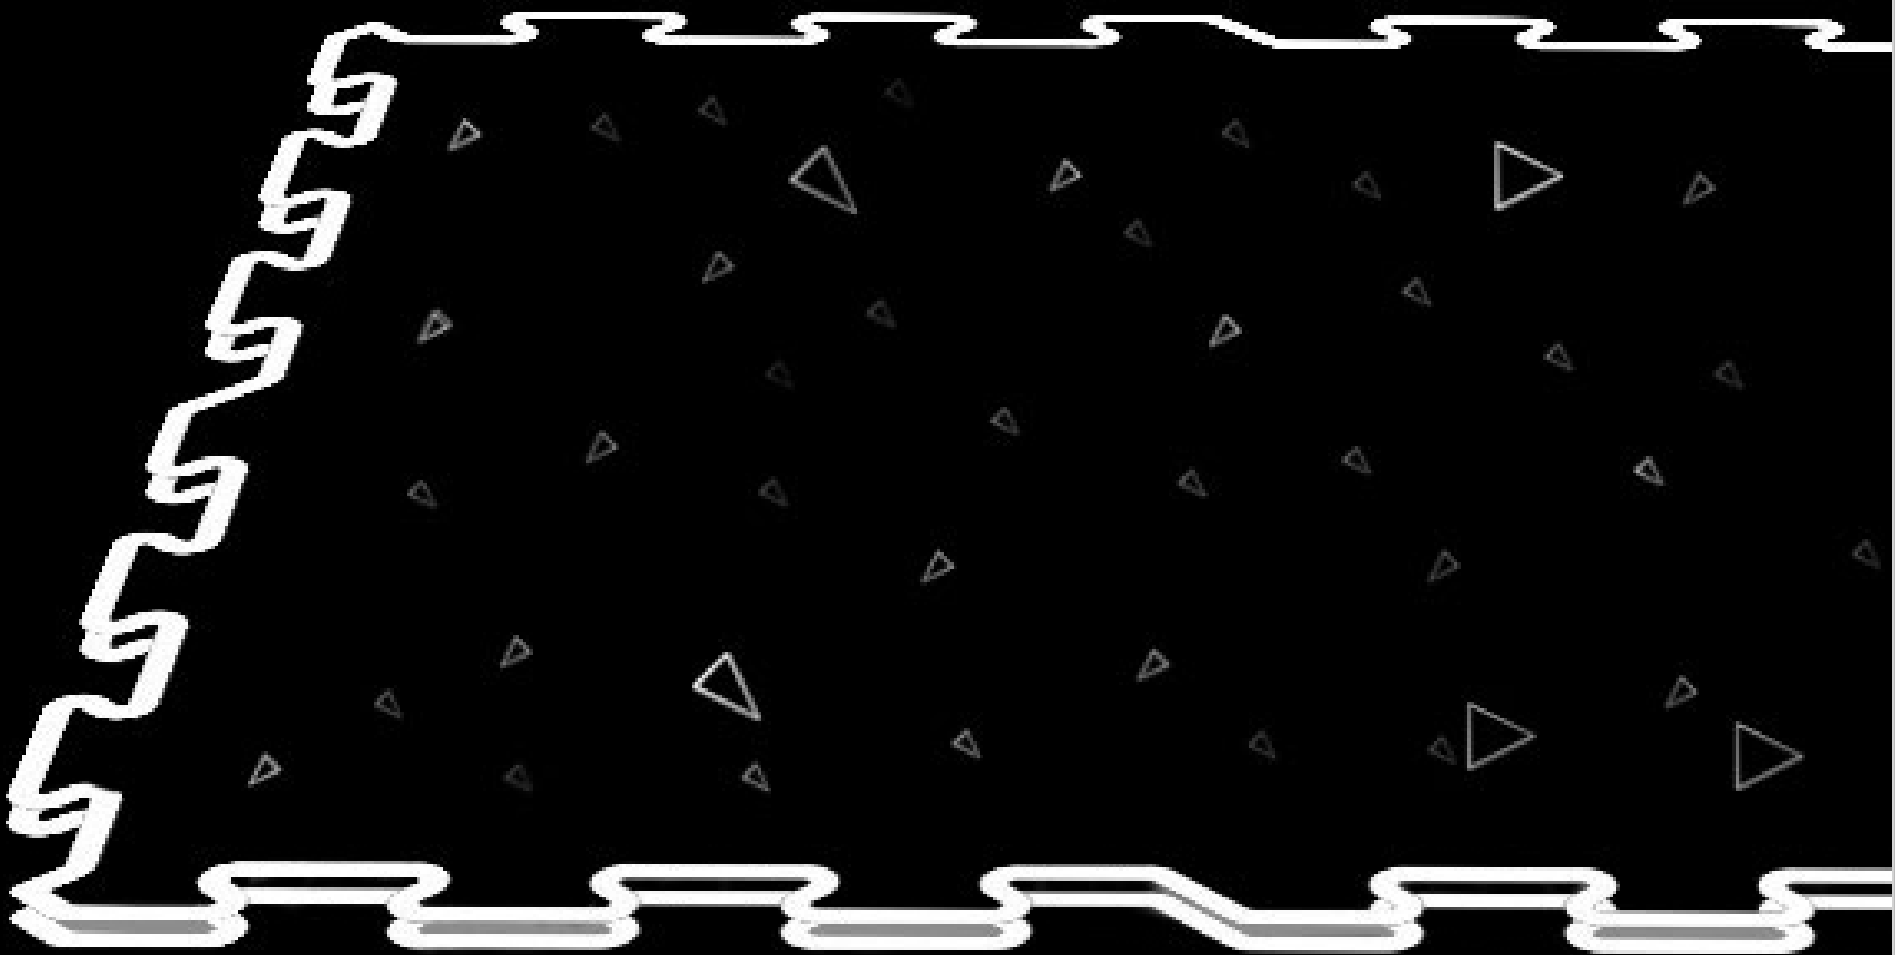

FORMATS


VersaTREAD Sheets

Sheet size: 4' x 6' (1.2m x 1.8m)

VersaTREAD 08

VersaTREAD 10

VersaTREAD 12

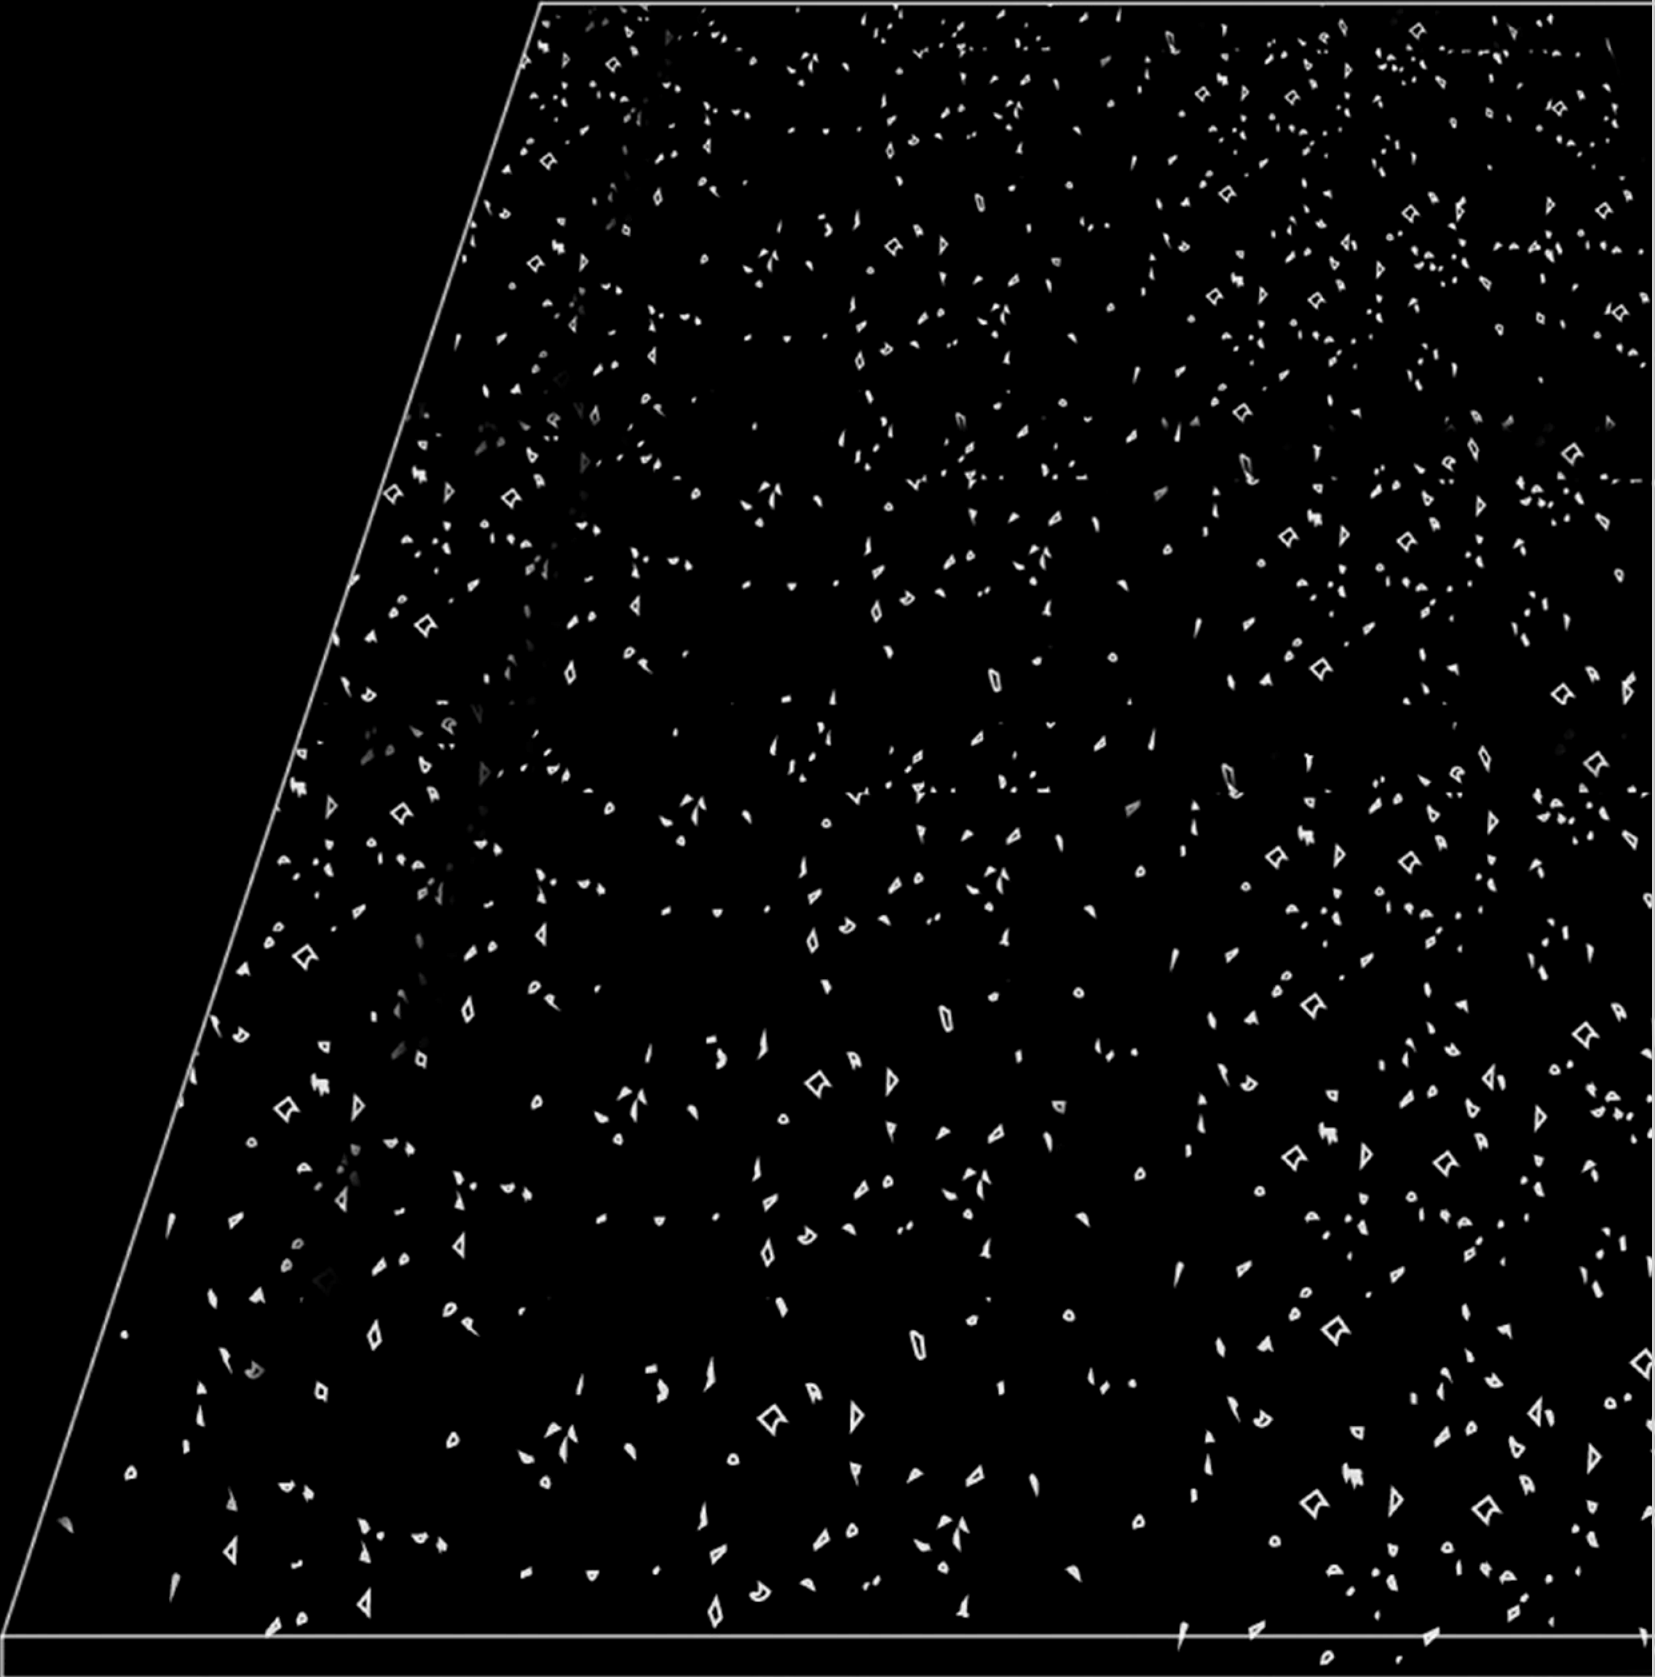


TECHNICAL SPECIFICATIONS

	ASTM	
Shore Hardness	D2240	>70 (5)
Compression Set	D395	-15 to -45% @25%
Taber Abrasion	C501	0.45
Abrasion Resistance	D3389	0.11g, 300 cycles
Wear Index	D3389	0.386
Tensile Strength	D412	>300 psi
Elongation at Break	D412	>90%
Coefficient of Friction	D1894-95	Wet 1.20 / Dry 1.20
Density	D729	>65 lb/ft
Critical Radiant Flux	D395	Class I/II
Tear	D624	88.07 lbf/in
Chemical Resistance	F925-02	No Change
Ignition Characteristics	D2859	Pass

Warranty: Pliteq Flooring warrants that VersaTREAD, when installed according to its recommended procedures and adhesives, will be free from manufacturing defects. For more information, please review the Limited Lifetime Warranty document or contact your local Pliteq representative.



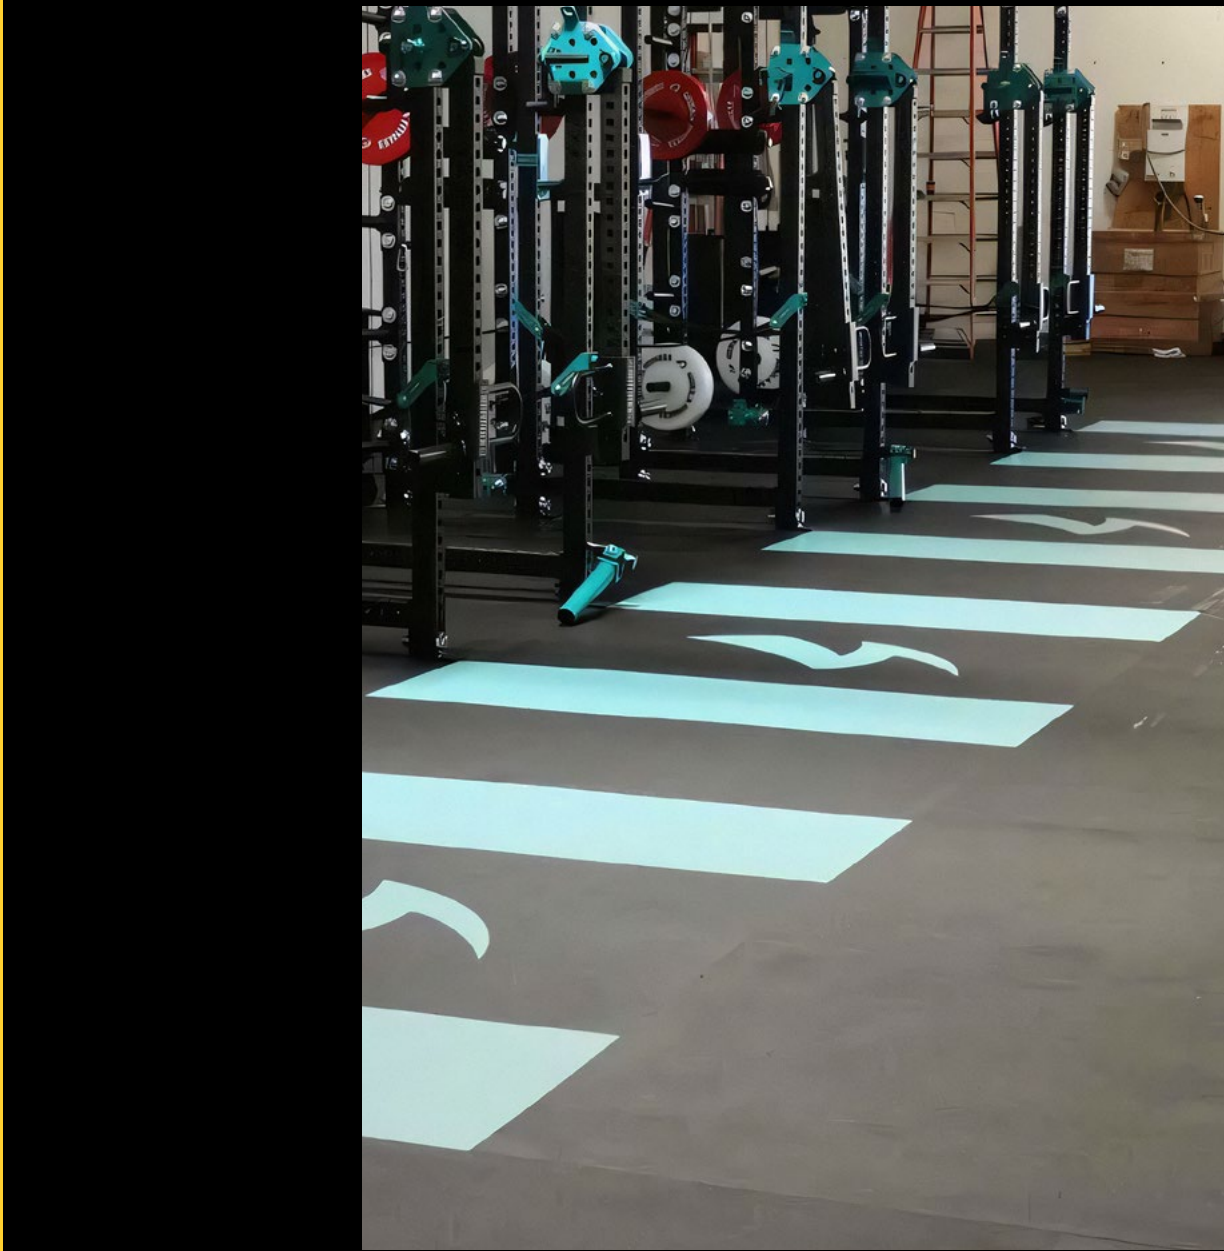



Pliteq Flooring

E. info@pliteqflooring.com

W. pliteqflooring.com

T. 1.888.491.6549

© 2025 Pliteq Flooring. All rights reserved.