

# VersaTREAD

**Description & Application:** A versatile and durable Rubber Floor – used for a wide range of market segments, including sport, fitness, schools, commercial spaces, and retail environments. VersaTREAD is made from recycled rubber content and coloured EPDM granules, crafted with precision and engineered for performance. Pliteq Floorings rubber is designed to meet the unique needs of each market, ensuring safety, comfort, and style for all.

**Warranty:** Pliteq Flooring warrants that VersaTREAD, when installed according to its recommended procedures and adhesives, will be free from manufacturing defects during regular use for 10 years from the original installation date. For more information, please reach out.

## TECHNICAL SPECIFICATIONS

	ASTM	1/8" - 1/2" (3-12mm)
Shore Hardness	D2240	>70 (± 5)
Compression Set	D395	-15 to -45% @25%
Taber Abrasion	C501	0.45
Abrasion Resistance	D3389	0.11g, 300 cycles
Wear Index	D3389	0.386
Tensile Strength	D412	>300 psi
Elongation At Break	D412	>90%
Coefficient of Friction	D1894-95	Wet 1.20 / Dry 1.20
Density	D729	>65 lb/ft <sup>3</sup>
Critical Radiant Flux	D395	Class I/II
Tear	D624	88.07 lbf/in
Chemical Resistance	F925-02	No Change


## PHYSICAL SPECIFICATIONS

FORMAT	ROLLS
DIMENSIONS	4' x 25' (1.2 m x 7.6 m)
THICKNESS	1/8" (3 mm), 1/4" (6 mm), 5/16" (8 mm), 3/8" (10 mm), 1/2" (12mm)
SF/UNIT	100 SF (9.3 m <sup>2</sup> )
WEIGHT/ROLL	128-221 lb (58 - 100.3 kg)


FORMAT	TILE
DIMENSIONS	2' x 2' or 3.5' x 3.5' (0.6m x 0.6m or 1 m x 1 m)
THICKNESS	1/4" (6mm), 5/16" (8 mm), 3/8" (10 mm)
SF/UNIT	4 SF or 12 SF (0.4m <sup>2</sup> or 1.1 m <sup>2</sup> )

FORMAT	SHEET
DIMENSIONS	4' x 6' (1.2 m x 1.8 m)
THICKNESS	3/8" (10 mm), 1/2" (12 mm)
SF/UNIT	24 SF (2.2 m <sup>2</sup> )

## COLOR OPTIONS




1710 GAMETIME GREEN




1711 WILDCARD WHITE




1712 STERLING SILVER

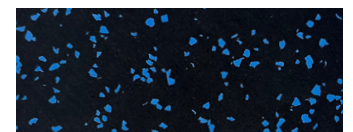

1713 BREAKAWAY BLUE



1714 REBOUND RED

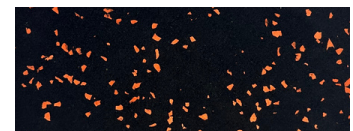

1715 OVERTIME ORANGE

Additional Colors available. MOQ may apply.



1-888-491-6549



info@pliteqflooring.com



www.pliteqflooring.com