VersatreAD

Sustainable and Durable Finished Rubber Flooring





ENGINEERED FOR PERFORMANCE

Get the perfect combination of durability and comfort with Pliteq's high-performance rubber flooring. Easy to install, VersaTREAD is engineered for long lasting performance. Superior density and tensile strength, with minimal mainenance needed. The textured surface enhances slip resistance, making it ideal for high-traffic commercial and fitness environments. Available in multiple formats, including rolls, tiles, and sheets. VersaTREAD offers design flexibility with a range of standard and premium color blends to complement any space. Built to withstand heavy wear while maintaining its performance.


VERSATREAD

ENGINEERED TO PERFORM. DESIGNED TO IMPRESS



PERFORMANCE YOU CAN FEEL

Engineered for durability and comfort underfoot in every step.



AESTHETICS WITHOUT COMPROMISE

Sleek, modern finishes that elevate design without sacrificing function.



BETTER FOR THE PLANET, BUILT FOR THE FUTURE.

Made with sustainable materials and responsible manufacturing practices.



PERFORMANCE YOU CAN FEEL. ENGINEERED FOR LONGEVITY.

Optimized Durability


With zero crumbliness overtime, VersaTREAD resists tearing and cracking - even under the toughest conditions.

Enhanced Finish

Engineered with less than 1% porosity - superior for maintenance and floor life.

Built to Last

Designed to withstand heavy foot traffic, skates, and cleats - optimal for long lasting performance.

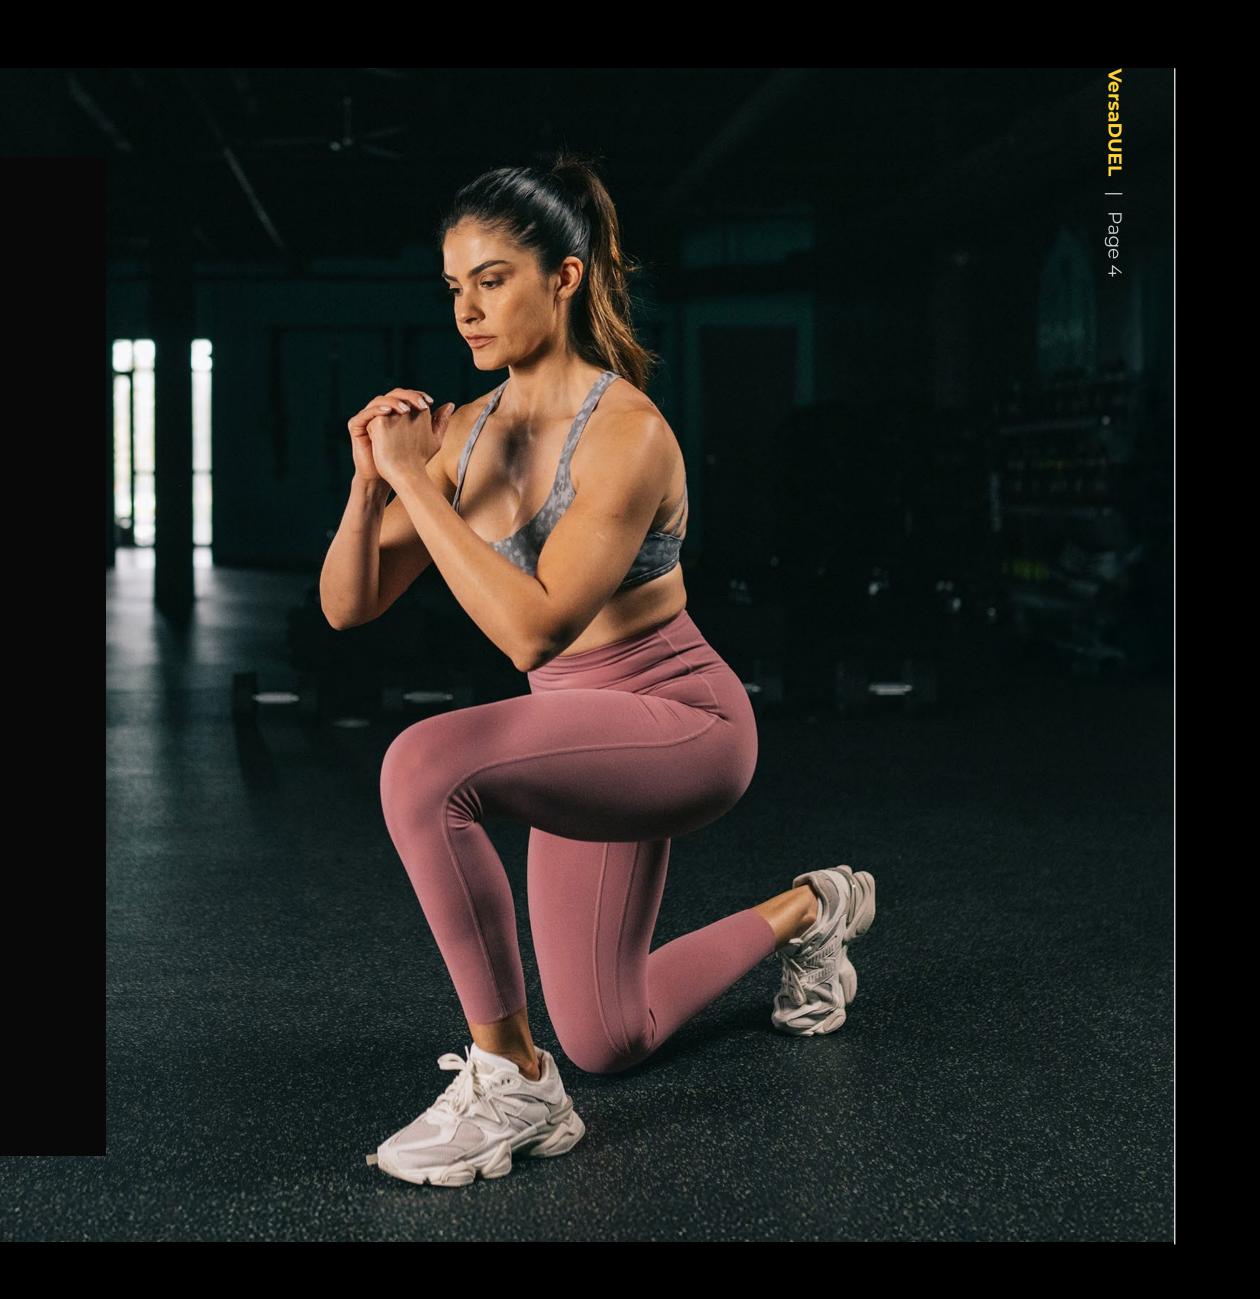

PERFORMANCE YOU CAN FEEL. ENGINEERED FOR LONGEVITY.

VersaTREAD Abrasion Resistance (ASTM D3389)

Low abrasion number = High wear resistance = Longer life.

Avg. Mass Loss (g)

VersaTREAD - Unvulcanized

Competitor Rubber - Unvulcanized

Competitor Rubber - Vulcanized

0.116

0.207

Avg. Wear Index (I)

VersaTREAD - Unvulcanized

Competitor Rubber - Unvulcanized

Competitor Rubber - Vulcanized

0.386

0.689

PERFORMANCE YOU CAN FEEL. ENGINEERED FOR LONGEVITY.

VersaTREAD Tensile Strength (psi)

High tensile strength = Less likely to break/stretch = Longer life

VersaTREAD - Unvulcanized

322.77

Competitor Rubber - Unvulcanized

228.72

Competitor Rubber - Vulcanized

801.13

VersaTREAD Density (kg/m³)

High density = Stiffer, more durable material = Longer life

VersaTREAD - Unvulcanized

1115.17

Competitor Rubber - Unvulcanized

1047.9

Competitor Rubber - Vulcanized

1608.96

PERFORMANCE YOU CAN FEEL. ENGINEERED FOR LONGEVITY.

VersaTREAD Porosity (%)

Low porosity = Tough against water, stains, and wear = Longer life

VersaTREAD - Unvulcanized

0.62

Competitor Rubber - Unvulcanized

4.38

Competitor Rubber - Vulcanized

0.21

When comparing Abrasion, Tear Strength, Tensile Strength, and Surface Porosity, Pliteq's VersaTREAD unvulcanized rubber is the highest performing unvulcanized rubber in the industry. With our in depth engineering capabilities, the VersaTREAD performs almost the same if not similar to a vulcanized rubber floor without the additional VOCs and off gassing.

TECHNICAL SPECIFICATIONS

ASTM

Shore Hardness	D2240	>70 (5)
Compression Set	D395	-15 to -45% @25%
Taber Abrasion	C501	0.45
Abrasion Resistance	D3389	0.11g, 300 cycles
Wear Index	D3389	0.386
Tensile Strength	D412	>300 psi
Elongation at Break	D412	>90%
Coefficient of Friction	D1894-95	Wet 1.20 / Dry 1.20
Density	D729	>65 lb/ft
Critical Radiant Flux	D395	Class I/II
Tear	D624	88.07 lbf/in
Chemical Resistance	F925-02	No Change
Ignition Characteristics	D2859	Pass

Warranty: Pliteq Flooring warrants that VersaTREAD, when installed according to its recommended procedures and adhesives, will be free from manufacturing defects. For more information, please review the Limited Lifetime Warranty document or contact your local Pliteq representative.



AESTHETICS WITHOUT COMPROMISE

Bold by Design

Choose from 8 standard colour tones or mix custom EPDM blends for truly unique design possibilities

Various Formats

Rolls, puzzle tiles, large puzzle tiles, or sheets - VersaTREAD offers flexibility for every project scale and layout.

Sleek, Clean, Non-Porous Finish

Built-in resistance to moisture, mold, and bacteria. Maintains a fresh, hygienic look with minimal upkeep.






COLOR OPTIONS

Choose from our broad selection of color options. Reach out to your local Pliteq sales rep for more details.

Standard







1711 Wildcard White



1712 Sterling Silver



1713
Breakaway
Blue




1714
Rebound
Red



1715 Overtime Orange



1716 Coach Cork



1717 Bold Black

Premium



1701 Mulch



1702 **Sandstone**



1703 **Obsidian**



1704 **Granite**



1705 **Concrete**



1706 **Marble**





CUSTOM COLOR OPTIONS

Create a unique flooring pattern for your project with a custom mix of 24 EPDM colors that you can blend together for a variety of aesthetic designs.





FORMATS

VersaTREAD ROIIS

Roll size: 4' x 25' (1.2 m x 7.6 m)

VersaTREAD 03


VersaTREAD 06

VersaTREAD 08

VersaTREAD 09

VersaTREAD 10

VersaTREAD 12

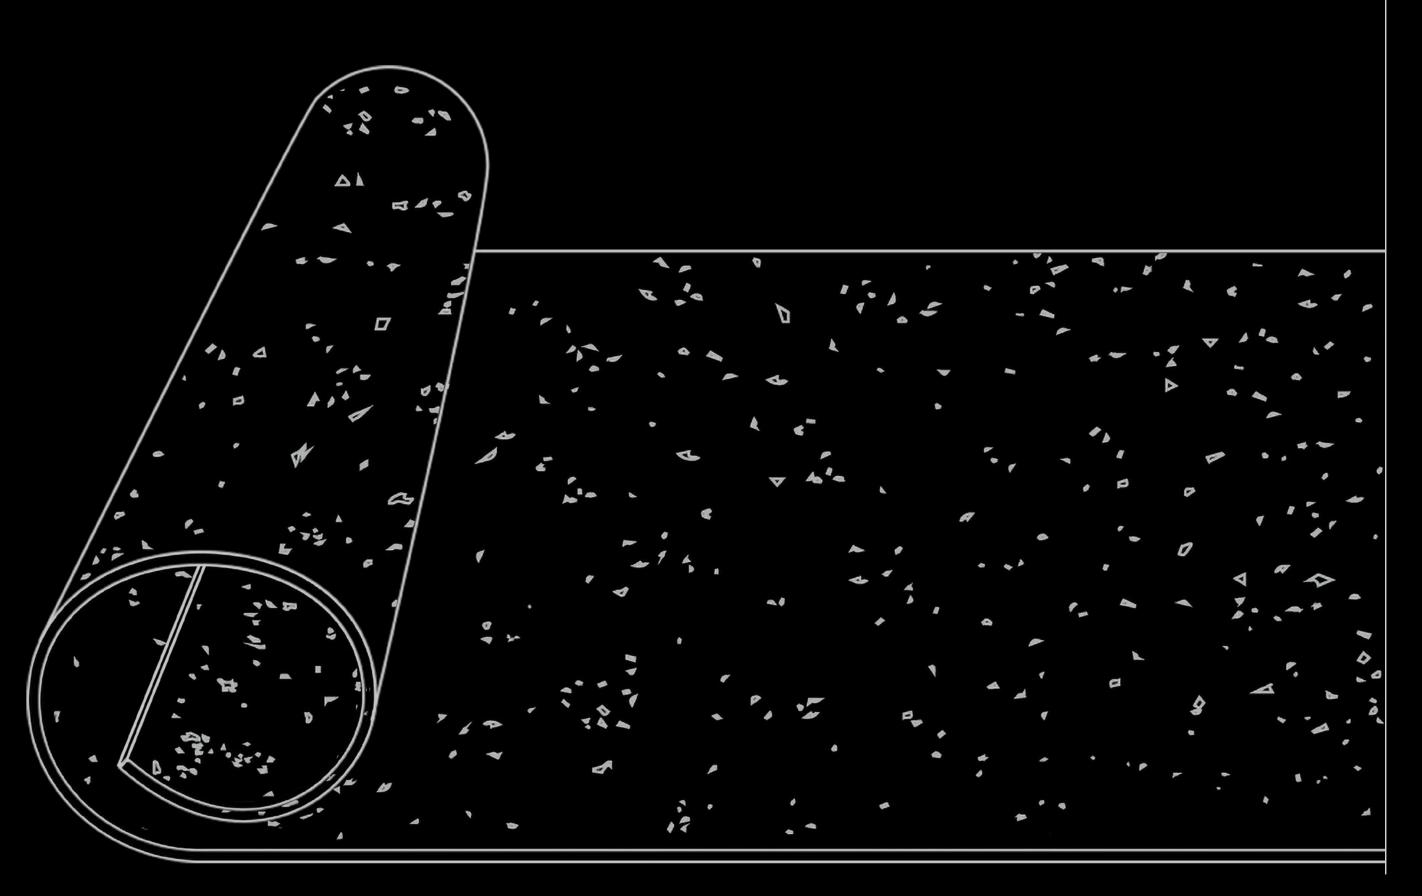

VersaTREAD Puzzle Tile

Tile size: 1.92' x 1.92' or 3.5' x 3.5' (0.58 m x 0.58 m or 1 m x 1 m)


VersaTREAD 06

VersaTREAD 08

VersaTREAD 09

VersaTREAD 10

3.5' x 3.5' available upon request.

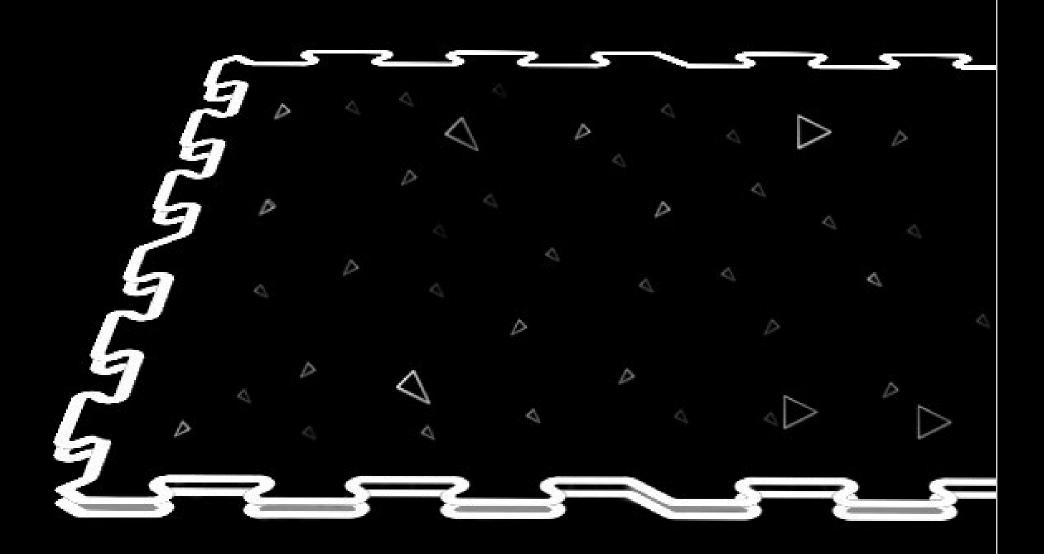

FORMATS


VersaTREAD Sheets

Sheet size: 4' x 6' (1.2 m x 1.8 m)

VersaTREAD 08

VersaTREAD 10

VersaTREAD 12

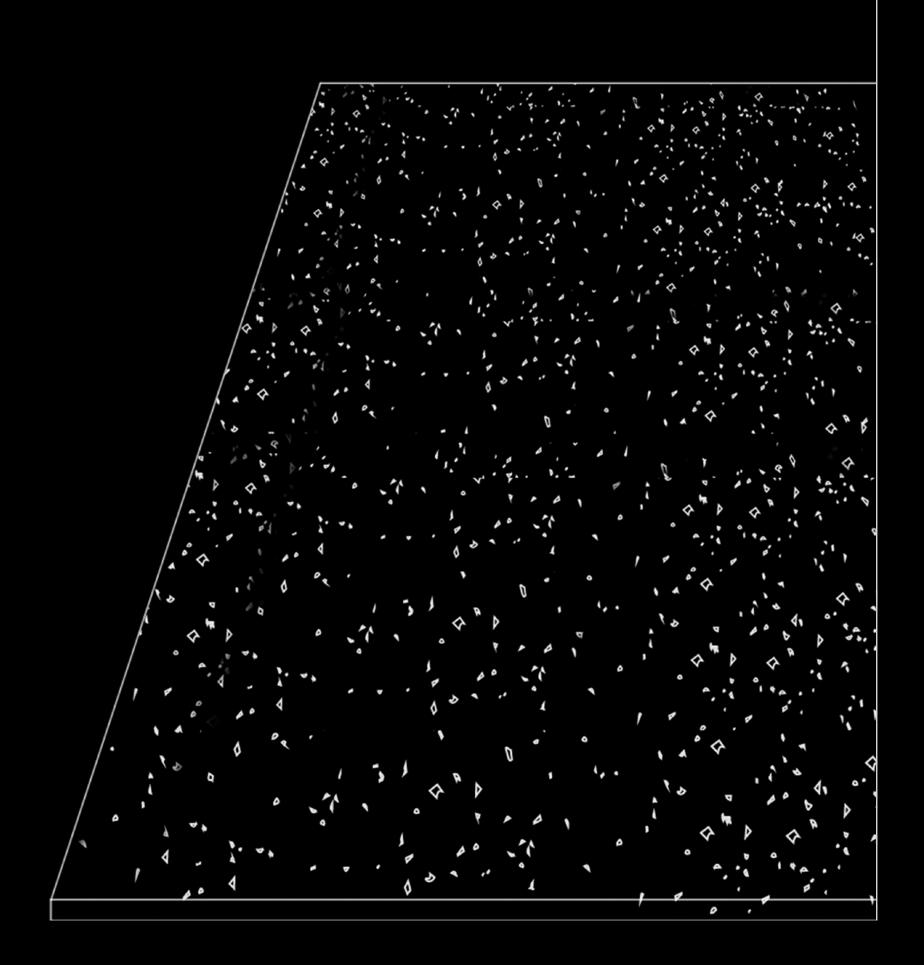

BETTER FOR THE PLANET. BUILD FOR THE FUTURE.

Made from up to 92% post-consumer recycled materials

Each tile helps divert waste from landfills, including thousands of recycled tires annually.


Fully recyclable and LEED® eligible

Supports sustainable building goals with end-of-life recyclability and LEED contribution potential.

Manufactured for long lifecycle and low replacement demand

Built to last; and when it's time, our takeback program ensures responsible recycling.



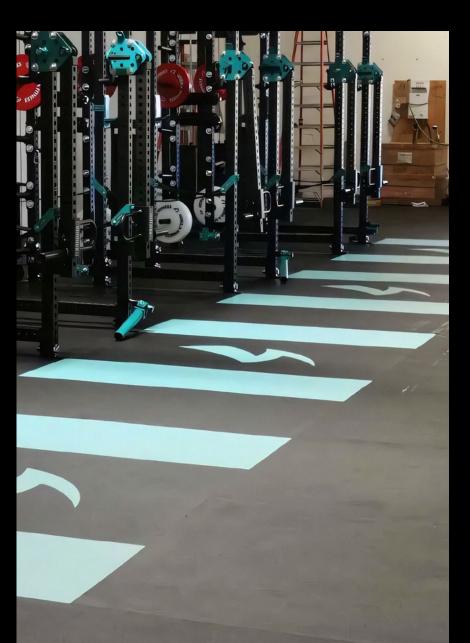















Pliteq Flooring

- E. info@pliteqflooring.com
- W. pliteqflooring.com
- **T.** 1.888.491.6549

© 2025 Pliteq Flooring. All rights reserved.