

# VersaDUEL 50

**Description & Application:** A durable multi-layer rubber floor system, featuring a dimpled base, interstitial layer, and a pre-bonded dual-layer finished layer, available in three formats: Roll, Square Edge Tiles, and Large Square Edge Tiles. Made from recycled rubber and EPDM granules, it is designed for impact reduction and injury prevention in fitness centers and high-traffic areas. It provides shock absorption, vibration damping, and noise control for various environments.

**VersaDUEL** flooring reduces impacts from falling/dropping objects, eases fatigue, reduces joint and muscle stress, and prevents repetitive motion injuries and discomfort from standing for long periods of time.

## PHYSICAL SPECIFICATIONS

|                    |                                                                                                                         |
|--------------------|-------------------------------------------------------------------------------------------------------------------------|
| Thickness          | 2" (nom. 50mm)                                                                                                          |
| Dimensions         |                                                                                                                         |
| Finished Layer*    | 4' x 15' (1.2m x 4.6m) Roll<br>2' x 2' (0.6m x 0.6m) Square Edge Tiles<br>2' x 4' (0.6m x 1.2m) Large Square Edge Tiles |
| Interstitial Layer | 3.33' x 4' (1m x 1.2m) Sheet                                                                                            |
| Dimpled Layer      | 4' x 25' (1.2m x 7.6m) Roll                                                                                             |

## TECHNICAL SPECIFICATIONS

### ASTM

|                          |          |                        |
|--------------------------|----------|------------------------|
| Shore Hardness           | D2240    | >70 (± 5)              |
| Compression Set          | D395     | -15 to -45% @25%       |
| Taber Abrasion           | C501     | 0.45                   |
| Abrasion Resistance      | D3389    | 0.11g, 300 cycles      |
| Wear Index               | D3389    | 0.386                  |
| Tensile Strength         | D412     | >300 psi               |
| Elongation At Break      | D412     | >90%                   |
| Coefficient of Friction  | D1894-95 | Wet 1.20 / Dry 1.20    |
| Density                  | D729     | >65 lb/ft <sup>3</sup> |
| Critical Radiant Flux    | D395     | Class I/II             |
| Tear                     | D624     | 88.07 lbf/in           |
| Chemical Resistance      | F925-02  | No Change              |
| Ignition Characteristics | D2859    | Pass                   |

\*Values for the wear-layer of the product

\*Glue down the finished layer to the base layer using Pliteq<sup>®</sup>FAS1 adhesive

**Warranty:** Pliteq Flooring warrants that VersaDUEL, when installed according to its recommended procedures and adhesives, will be free from manufacturing defects. For more information, please review the Limited Lifetime Warranty document or contact your local Pliteq representative.



1-888-491-6549




info@pliteqflooring.com




www.pliteqflooring.com

# VersaDUEL 50


## STANDARD COLOR OPTIONS



1700 BOLD BLACK




1710 GAMETIME GREEN




1711 WILDCARD WHITE




1712 STERLING SILVER




1713 BREAKAWAY BLUE



1714 REBOUND RED




1715 OVERTIME ORANGE

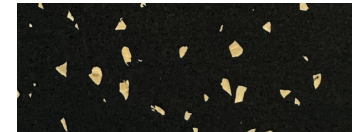


1716 COACH CORK


## PREMIUM COLOR OPTIONS




1701 MULCH



1702 SANDSTONE



1703 OBSIDIAN



1704 GRANITE



1706 MARBLE

Additional Colors available, MOQ may apply.



1-888-491-6549



info@pliteqflooring.com



www.pliteqflooring.com