



VersaDUEL 25

Description & Application: A durable pre-bonded 2-layer rubber floor system with a tile finish made from recycled rubber and EPDM granules, designed for impact cushioning and injury prevention in fitness centers and high-traffic areas. It provides shock absorption, vibration damping, and noise control for various environments. **VersaDUEL** is used to cushion impacts from falling objects, reduce fatigue, prevent injuries from repetitive motion and standing for long periods, and ease muscle and joint stress.


PHYSICAL SPECIFICATIONS

Thickness	1" (nom. 25mm)
Dimensions	
Finished Layer	2' x 2' (0.6m x 0.6m) Square Edge Tiles 2' x 4' (0.6m x 1.2m) Large Square Edge Tiles

TECHNICAL SPECIFICATIONS

	ASTM	
Shore Hardness	D2240	>70 (± 5)
Compression Set	D395	-15 to -45% @25%
Taber Abrasion	C501	0.45
Abrasion Resistance	D3389	0.11g, 300 cycles
Wear Index	D3389	0.386
Tensile Strength	D412	>300 psi
Elongation At Break	D412	>90%
Coefficient of Friction	D1894-95	Wet 1.20 / Dry 1.20
Density	D729	>65 lb/ft ³
Critical Radiant Flux	D395	Class I/II
Tear	D624	88.07 lbf/in
Chemical Resistance	F925-02	No Change

*Values for the wear-layer of the product

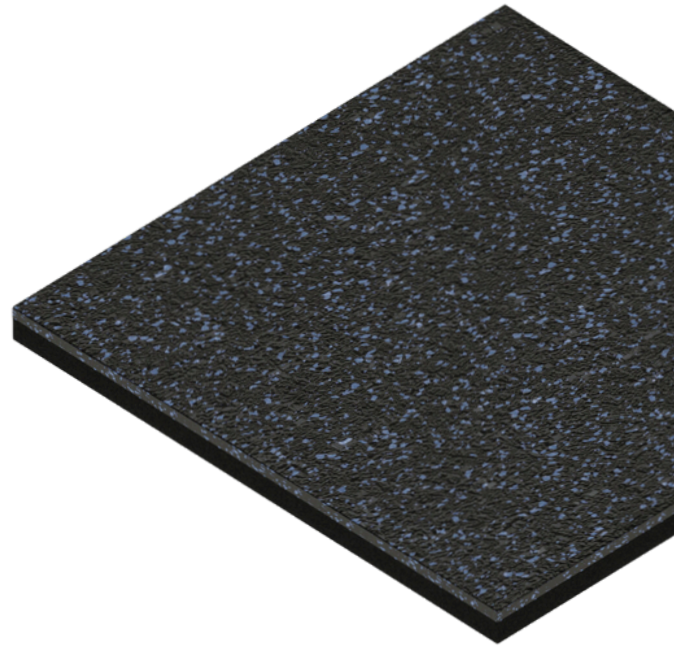

Warranty: Pliteq Flooring warrants that VersaDUEL, when installed according to its recommended procedures and adhesives, will be free from manufacturing defects. For more information, please review the Limited Lifetime Warranty document or contact your local Pliteq representative.



1-888-491-6549



info@pliteqflooring.com




www.pliteqflooring.com




VersaDUEL 25

STANDARD COLOR OPTIONS




1710 GAMETIME GREEN




1711 WILDCARD WHITE




1712 STERLING SILVER

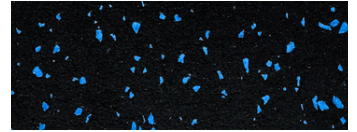


1713 BREAKAWAY BLUE



1714 REBOUND RED



1715 OVERTIME ORANGE




1716 COACH CORK




1717 BOLD BLACK


PREMIUM COLOR OPTIONS



1701 MULCH



1702 SANDSTONE



1703 OBSIDIAN



1704 GRANITE



1705 CONCRETE



1706 MARBLE

Additional Colors available, MOQ may apply.



1-888-491-6549



info@pliteqflooring.com



www.pliteqflooring.com