



VersaDUEL 18

Description & Application: A durable pre-bonded multi-layer rubber floor system made from recycled rubber and EPDM granules, designed for impact cushioning and injury prevention in fitness centers and high-traffic areas. It provides shock absorption, vibration damping, and noise control for various environments. VersaDUEL is used to cushion impacts from falling objects, reduce fatigue, prevent injuries from repetitive motion and standing for long periods, and ease muscle and joint stress.

PHYSICAL SPECIFICATIONS


Thickness	3/4" (nom. 18mm)
Dimensions	4' x 15' (1.2 m x 4.6 m) Roll
	24" x 24" (610 mm x 610 mm) Square Edge Tiles
	24' x 48' (610 mm x 1220 mm) Large Square Edge Tiles

TECHNICAL SPECIFICATIONS

ASTM

Shore Hardness	D2240	>70 (± 5)
Compression Set	D395	-15 to -45% @25%
Taber Abrasion	C501	0.45
Abrasion Resistance	D3389	0.11g, 300 cycles
Wear Index	D3389	0.386
Tensile Strength	D412	>300 psi
Elongation At Break	D412	>90%
Coefficient of Friction	D1894-95	Wet 1.20 / Dry 1.20
Density	D792	>65 lb/ft ³
Tear	D624	88.07 lbf/in
Chemical Resistance	F925-02	No Change
Flammability - Pill Test	D2859	Pass

*Values for the wear-layer of the product

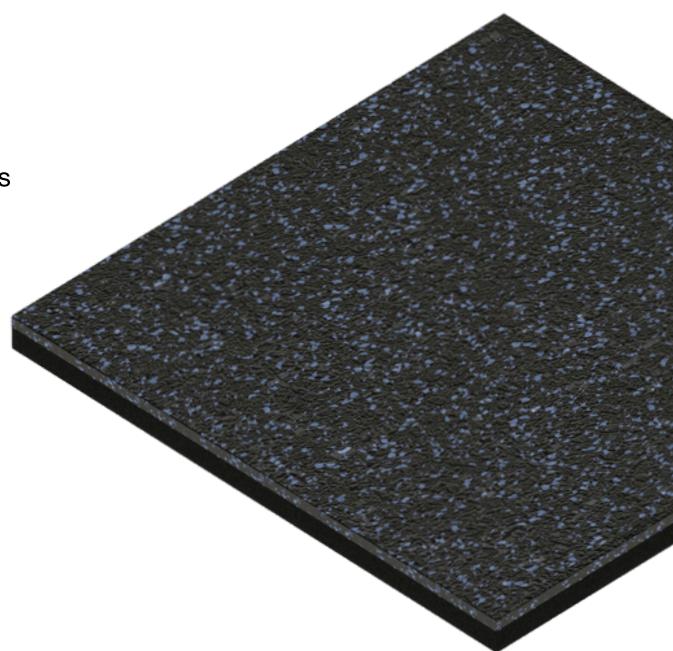

Warranty: Pliteq Flooring warrants that VersaDUEL, when installed according to its recommended procedures and adhesives, will be free from manufacturing defects. For more information, please review the Limited Lifetime Warranty document or contact your local Pliteq representative.



1-888-491-6549



info@pliteqflooring.com




www.pliteqflooring.com




VersaDUEL 18

STANDARD COLOR OPTIONS



1700 BOLD BLACK




1710 GAMETIME GREEN




1711 WILDCARD WHITE




1712 STERLING SILVER



1713 BREAKAWAY BLUE



1714 REBOUND RED



1715 OVERTIME ORANGE



1716 COACH CORK


PREMIUM COLOR OPTIONS



1701 MULCH



1702 SANDSTONE



1703 OBSIDIAN



1704 GRANITE



1706 MARBLE

Additional Colors available, MOQ may apply.